



NOTES:


1. SPECIFICATIONS:
 - 1.0 VOLTAGE RATING: 30V DC.
 - 1.1 CONTACT CURRENT RATING: 1A MAX. PER PIN.
 - 1.2 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.4 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
 - 1.5 OPERATING TEMPERATURE: -20°C~+80°C.

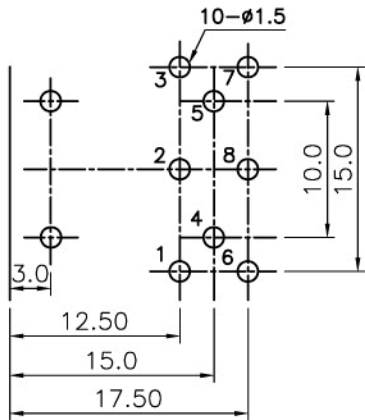


RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)




3 pin




4 pin




5 pin



6 pin



7 pin



8 pin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI DIN 804 W/O SHELLTYPE	
X.	±0.60	X.	±5°	UNITS		mm	SHEET SIZE	A4
.X	±0.38	.X	±3°					
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.								